



## FX SERIES

### Professional Power AMP

#### Features - FX Series

매우 높은 퀄리티를 추구하는 곳에서, 매우 높은 출력을 원하는 곳에서, 컴팩트한 사이즈의 FX시리즈는 대부분의 프로음향에 필요한 현장과 렌탈현장에서의 필요를 충족시켜 줄 것입니다.


#### 2U & 3U

Model Characteristic	FX300	FX700	FX1000	FX1500	FX1900
THD+Noise @ 1KHz Full Pwr	< 0.03%			< 0.003%	
IMD 60Hz & 7KHz, 4:1	< 0.038%			< 0.04%	
SIGNAL TO NOISE RATIO	>98dB			>105dB	
DIMENSION (mm)	482 x 88 x 461			482 x 132 x 443	
OUTPUT CIRCUIT TYPE	CLASS AB			CLASS AB	

#### POWER

Model Characteristic	FX300	FX700	FX1000	FX1500	FX1900
OUT Power (8Ω)	2X200W	2X400W	2X600W	2X900W	2X1200W
OUT Power (4Ω)	2X300W	2X700W	2X1000W	2X1500W	2X1900W
OUT Power (2Ω)	2X500W	2X1000W	2X1400W	2X2000W	2X2400W
OUT Power (bridge) (8Ω)	600W	1250W	1750W	2600W	3000W
OUT Power (bridge) (4Ω)	1000W	1700W	2300W	3400W	4000W
POWER SUPPLY FUSE (250)	5A	8A	12A	20A	25A
WEIGHT (KG)	15.5	17	19	23.5	30

#### 앰프의 모드 선택 셀렉터 및 리어 패널 (참조그림)

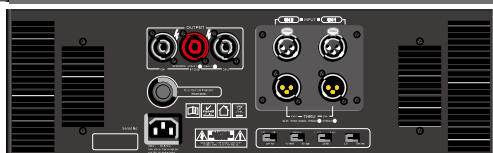

#### 공통사항

- DAMPING FACTOR 1Khz @ 8ohm : >400:1
- INPUT SENSITIVITY : Selectable (0.77v/1.0v/1.44v)
- INPUT IMPEDANCE : 20kΩ/Balanced, 10kΩ/un-Balanced
- INPUT CONNECTORS : Female XLR-3pin & Pararrel Link male XLR
- FREQEBCCT RESOIBSE@Half Pwr : 20Hz-20KHz, ±1dB
- OUTPUT CONNECTORS : 2 Speakon for Stereo & Bridge Output
- PROTECTIONS : Full short-circuit, open-circuit, Thermal, soft - start
- LED INDICATORS ( per channel ) : Bridge, parallel, power, signal, clip, protect
- PANEL CONTROLS : FRONT-2 input attenuators REAR-Ground lift, mode selection, compressor
- COOLING : FRONT-to-Back via 2 variable-speed fans
- POWER SUPPLY VOLTAGE : 220V / 60Hz